

Setting up Samsung F480 for Email Over GPRS



Prerequisite


1. Ensure your mobile phone is configured for Internet.

Setting up the Email Profile


1. To set up email, from the main screen, tap on **Menu**.
2. Tap on **Messages**.




3. Tap on **Settings**.

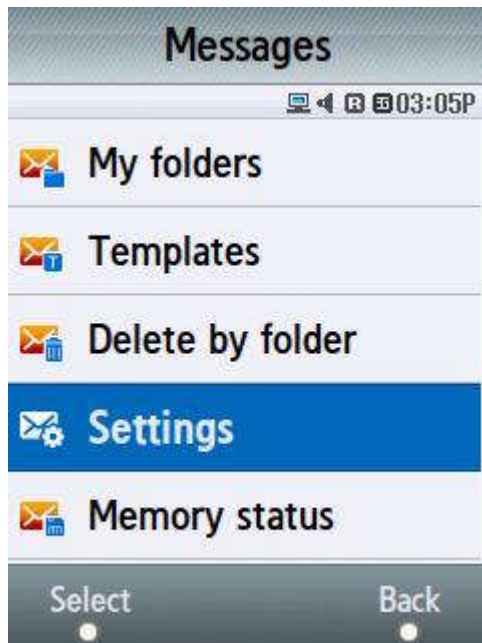


4. Tap on **Email**.

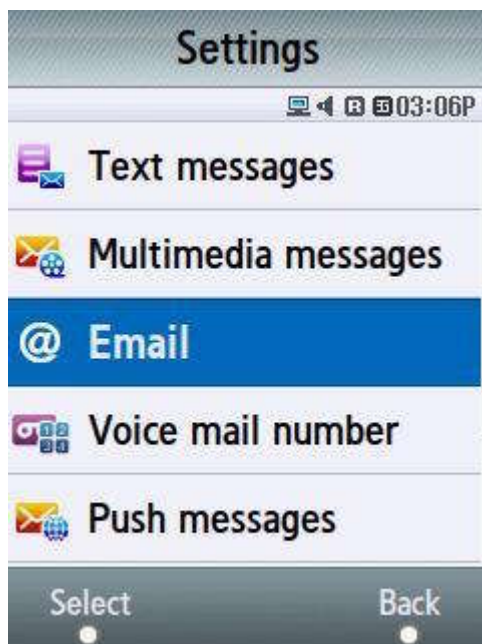


5. Tap on **Email accounts**.

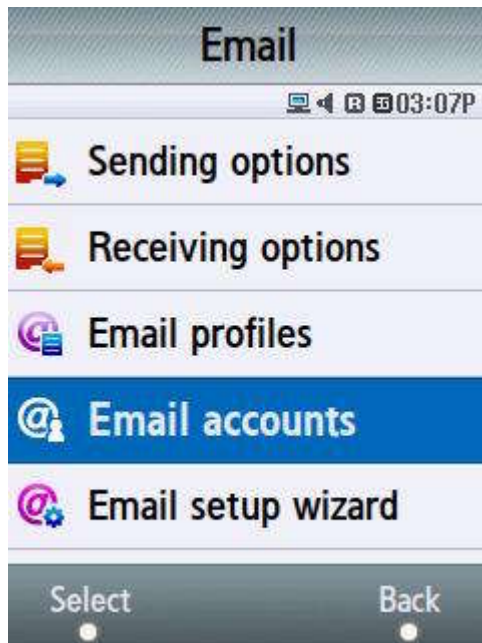


6. Tap on an empty account.

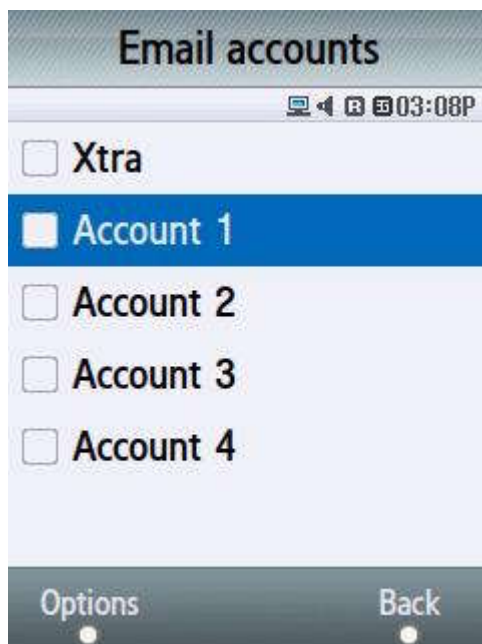


7. Tap on **Options**.

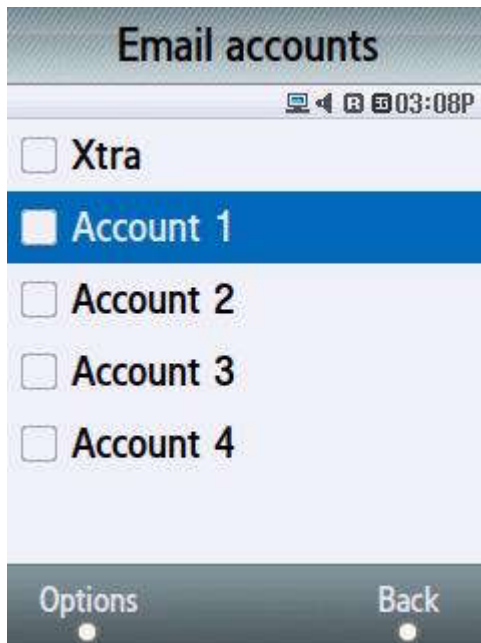

8. Tap on **Edit**.

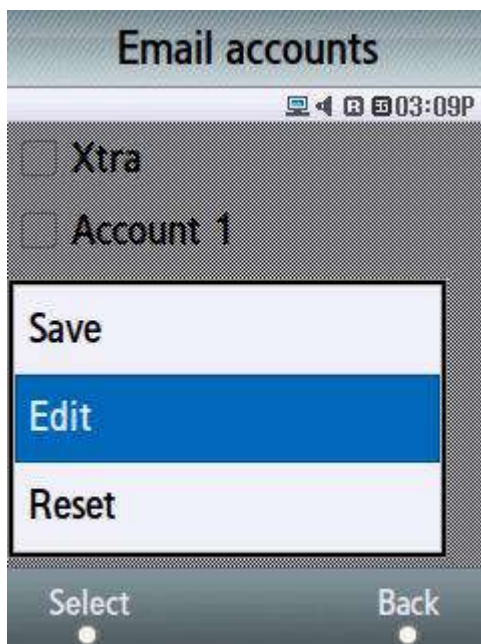

9. Tap on **Account name**.

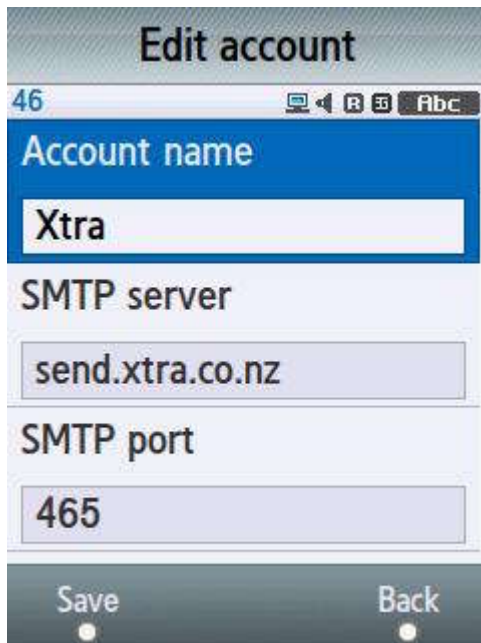

10. Enter a name for the Email mailbox and tap on **OK**.




11. Tap on **SMTP server**.

A screenshot of an "Edit account" screen in an email client. At the top, the title "Edit account" is displayed. Below it, a status bar shows the number "25" and a keyboard icon. The "Account name" field contains the text "Xtra". The "SMTP server" field is highlighted in blue and contains the text "send.xtra.co.nz". The "SMTP port" field contains the number "465". At the bottom, there are two buttons: "Save" and "Back".


12. Enter the outgoing server address for the Email mailbox and tap on **OK**.

A screenshot of an "SMTP server" screen in an email client. The title "SMTP server" is at the top. Below it, a status bar shows the number "25" and a keyboard icon. The "SMTP server" field contains the text "send.xtra.co.nz". Below the field is a numeric keypad with letters associated with each number. At the bottom, there are two buttons: "OK" and "Cancel".


13. Tap on **SMTP port**.

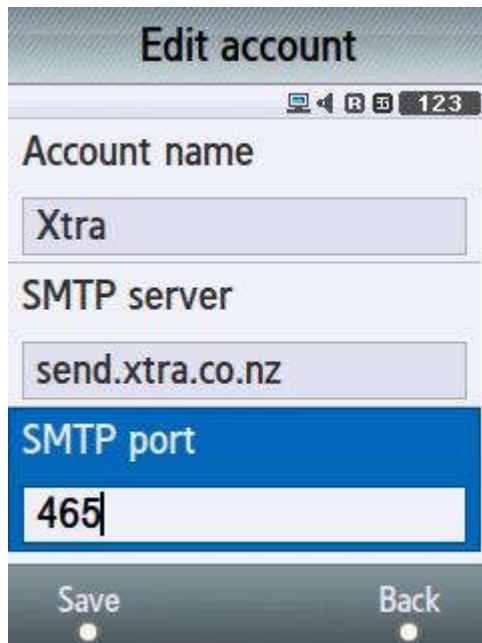A screenshot of an "Edit account" screen. The title bar is grey with the text "Edit account". Below the title bar is a status bar with icons for signal, Wi-Fi, battery, and the number "123". The screen contains three text input fields: "Account name" with the value "Xtra", "SMTP server" with the value "send.xtra.co.nz", and "SMTP port" with the value "465". The "SMTP port" field is highlighted with a blue background. At the bottom, there are two buttons: "Save" and "Back".


14. Enter the outgoing port number and tap on **OK**.

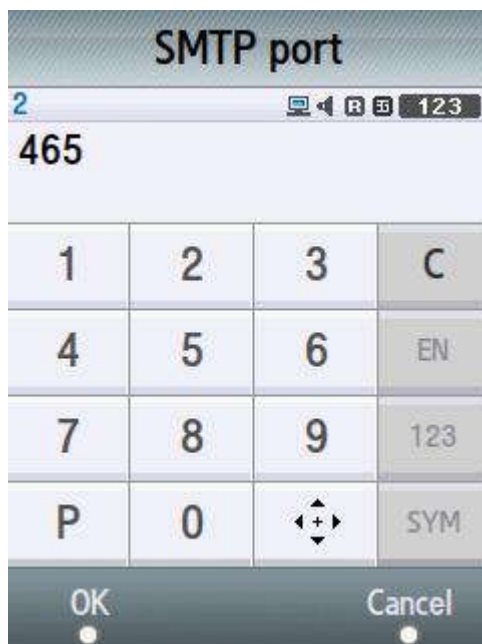A screenshot of a numeric keypad titled "SMTP port". The title bar is grey with the text "SMTP port". Below the title bar is a status bar with icons for signal, Wi-Fi, battery, and the number "123". The keypad displays the number "465" in a large font. Below the number is a grid of buttons: a row with "1", "2", "3", and "C"; a row with "4", "5", "6", and "EN"; a row with "7", "8", "9", and "123"; and a row with "P", "0", a directional pad icon, and "SYM". At the bottom, there are two buttons: "OK" and "Cancel".

15. Tap on **Secure connection** and tap on **SSL** if SSL is required.

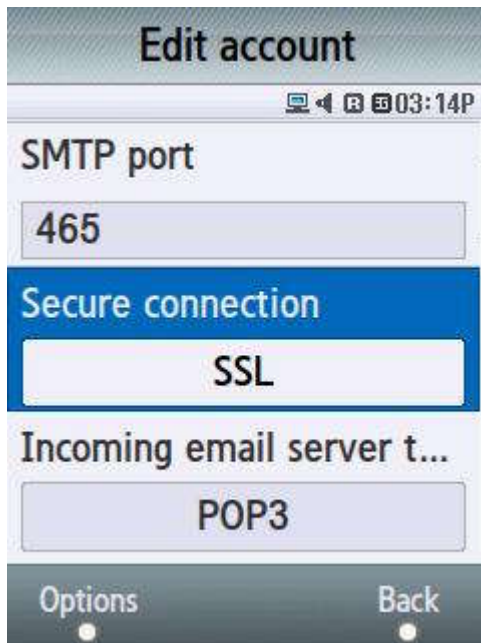


16. Tap on **OK**.

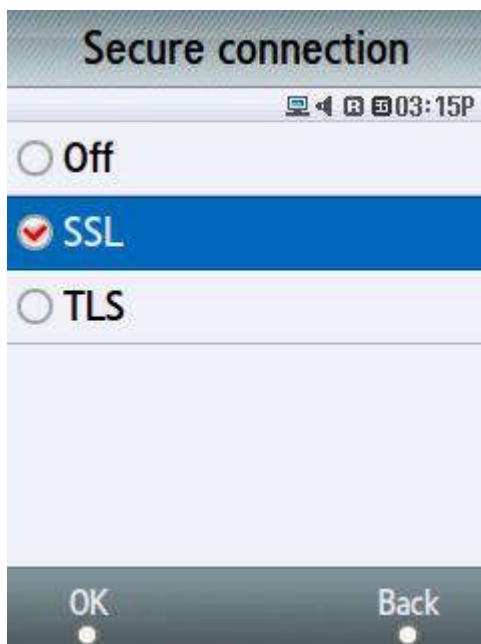

17. Tap on **Incoming email server type**.



18. Tap on the desired protocol and tap on **Select**.

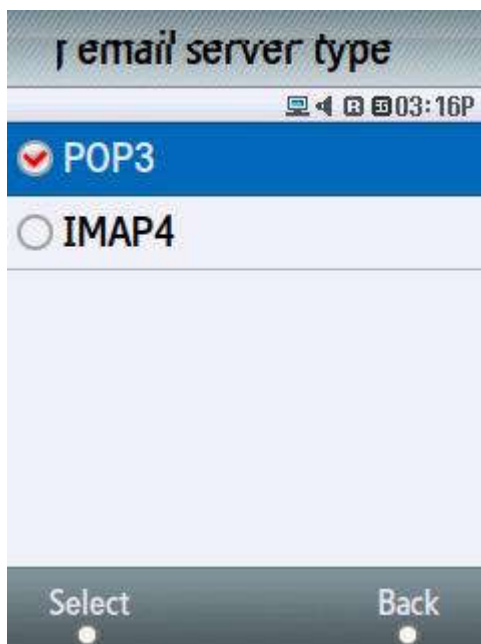


19. Tap on **[Protocol] server**.



20. Enter the incoming server address for the Email mailbox and tap on **OK**.



21. Tap on **[Protocol] port**.

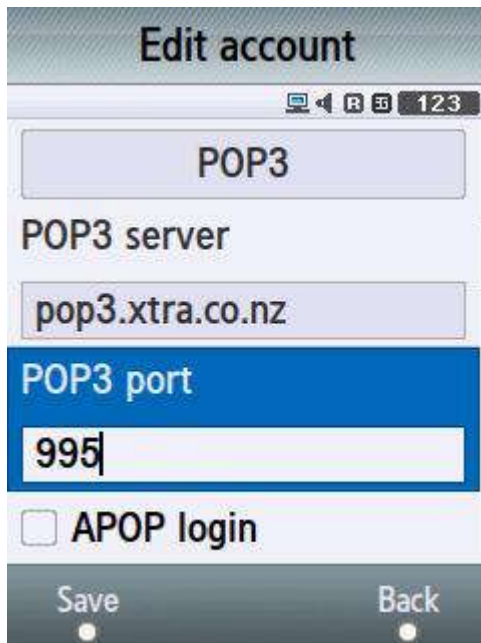


22. Enter the incoming port number and tap on **OK**.




23. Tap on **Secure connection** and tap on **SSL** if SSL is required.




24. Tap on **OK**.

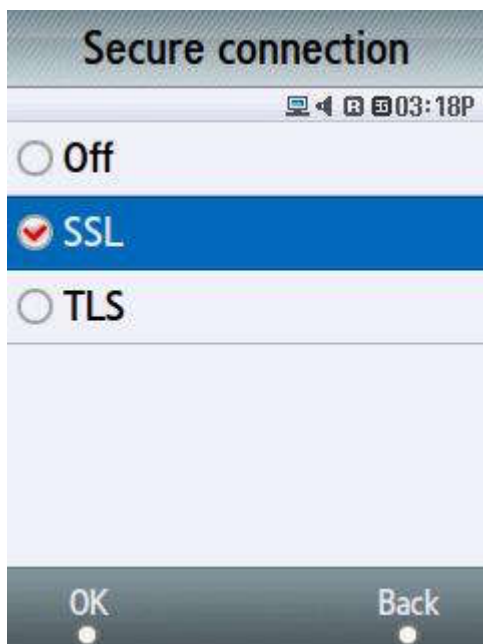


25. Tap on **Download limit**.

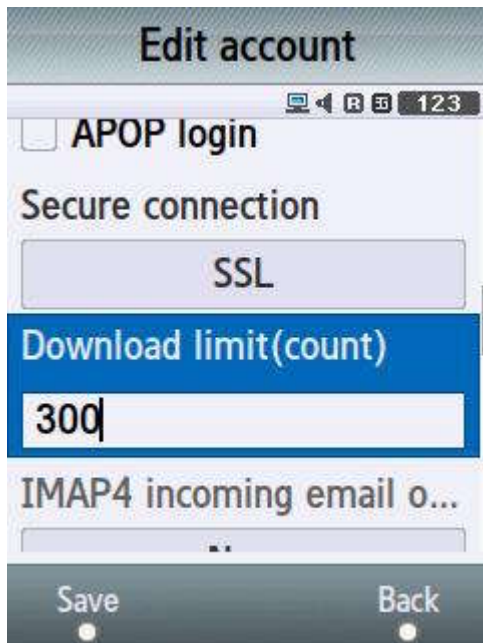


26. Enter **300** and tap on **OK**.

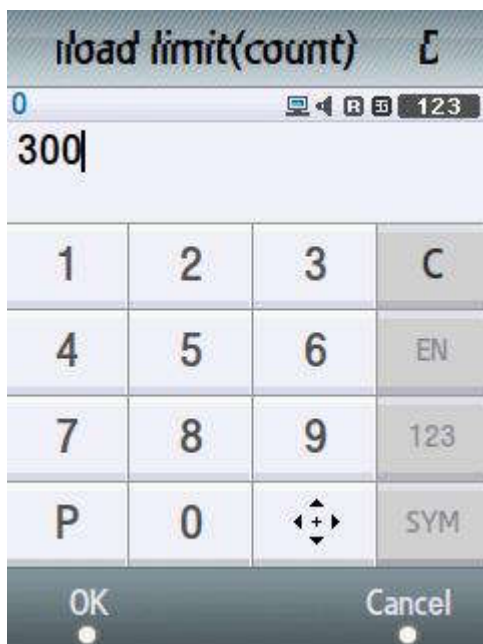

27. Tap on **Retrieving option**.

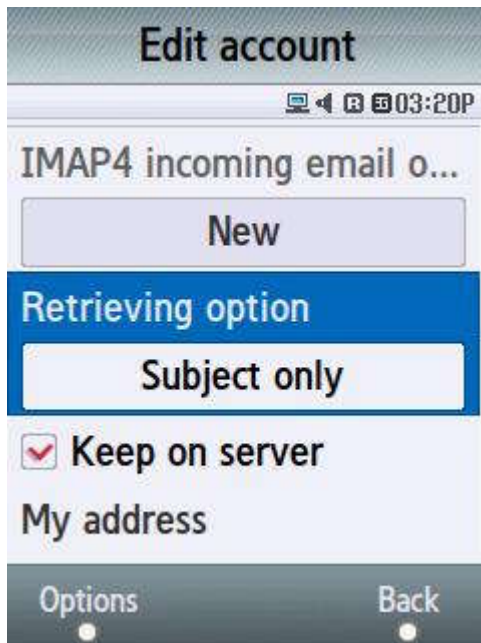

28. Tap on the desired retrieval option and tap on **Select**.

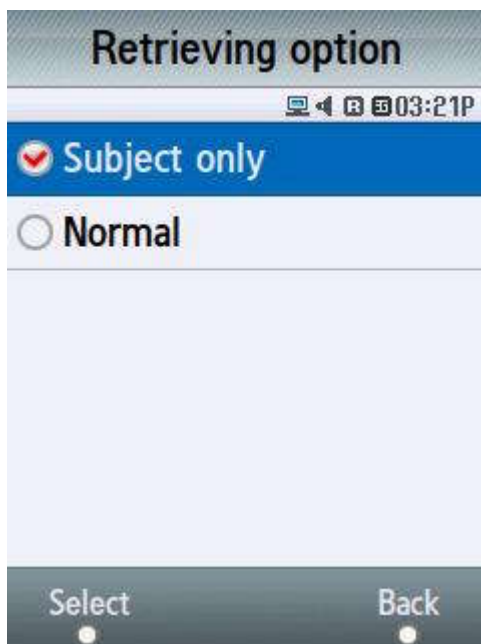

29. Tap on **My address**.

A screenshot of an iPhone-style mobile interface titled "Edit account". At the top, there is a status bar with the number "100" and a keyboard icon labeled "abc". Below the title, there is a "Subject only" button, a checked checkbox labeled "Keep on server", and a blue header for a section titled "My address". Underneath is an empty text input field. Below that is a "User name" label and another empty text input field. At the bottom, there are two buttons: "Save" and "Back".

30. Enter the Email address and tap on **OK**.

A screenshot of an iPhone-style mobile interface titled "My address". The status bar shows "79" and a keyboard icon labeled "abc". The text "john.smith@xtra.co.nz" is entered into the input field. Below the input field is a standard QWERTY keyboard layout with numbers 1-9, a backspace key, a zero key with "+=-<", a directional pad, and a "SYM" key. At the bottom, there are two buttons: "OK" and "Cancel".

31. Tap on **User name**.



32. Enter the username of the Email address and tap on **OK**.



33. Tap on **Password**.

A screenshot of a mobile application's "Edit account" screen. At the top, the title "Edit account" is displayed. Below it, the number "50" is shown on the left, and a status bar with icons and the text "abc" is on the right. The screen contains two text input fields, both containing the email address "john.smith@xtra.co.nz". The first field is labeled "User name". The second field is labeled "Password" and is currently empty. Below the password field is a checkbox labeled "Use POP before SMTP...". At the bottom of the screen are two buttons: "Save" on the left and "Back" on the right.


34. Enter the password for the Email address and tap on **OK**.

A screenshot of a mobile application's "Password" screen. The title "Password" is at the top. Below it, the number "50" is on the left, and a status bar with icons and the text "abc" is on the right. A text input field contains seven asterisks "*****" with a cursor at the end. Below the input field is a numeric keypad with four columns of buttons. The first column has buttons for "1 .,-", "4 ghi", "7 pqrs", and a backspace key. The second column has buttons for "2 abc", "5 jkl", "8 tuv", and "0 +=<". The third column has buttons for "3 def", "6 mno", "9 wxyz", and a directional pad. The fourth column has buttons for "C", "EN", "abc", and "SYM". At the bottom of the screen are two buttons: "OK" on the left and "Cancel" on the right.

35. Tap on **Save**.



36. Press the **End call** key to return to the main screen.

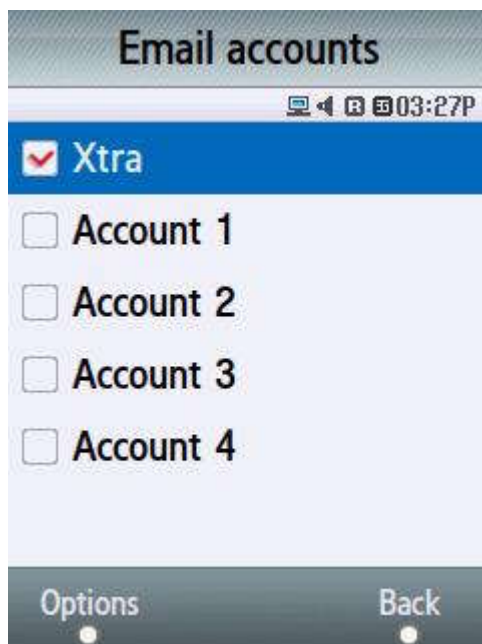

The handset is now configured for Email and is ready for use.